

포털 사용 오류 안내

- Chrome
- Internet Explore

Chrome

① 기본 설정 변경(Same-site)

chrome://flags/#same-site-by-default-cookies

The screenshot shows the Chrome 'Experiments' page for the flag 'SameSite by default cookies'. The address bar is highlighted with a red box and contains the URL 'chrome://flags/#same-site-by-default-cookies'. A red arrow points from this box to a text box above. The flag's dropdown menu is open, and 'Disabled' is selected, also highlighted with a red box. A second red arrow points from this box to the 'Relaunch' button at the bottom right, which is also highlighted with a red box. The page includes a search bar, a 'Reset all' button, and a list of other flags with their descriptions and current settings.

Search flags Reset all

SameSite by default cookies
Treat cookies that don't specify a SameSite attribute as if they were SameSite=Lax. Sites must specify SameSite=None in order to enable third-party usage. – Mac, Windows, Linux, Chrome OS, Android
[#same-site-by-default-cookies](#)

Default
Default
Disabled

Cookies without SameSite must be secure
If enabled, cookies without SameSite restrictions must also be Secure. If a cookie without SameSite restrictions is set without the Secure attribute, it will be rejected. This flag only has an effect if "SameSite by default cookies" is also enabled. – Mac, Windows, Linux, Chrome OS, Android
[#cookies-without-same-site-must-be-secure](#)

Default

Enterprise real-time extension request report
Enable the real-time extension request uploading. The feature requires the enterprise reporting and extension request being enabled. – Mac, Windows, Linux, Chrome OS
[#enterprise-realtime-extension-request](#)

Default

Unsafe fast JS calls
Enables experimental fast API between Blink and V8. Warning: type checking, few POD types and array types are not supported yet, so crashes are possible. – Mac, Windows, Linux, Chrome OS, Android
[#enable-unsafe-fast-js-calls](#)

Disabled


Allows synchronous XHR requests in page dismissal
Allows synchronous XHR requests during page dismissal when the page is being navigated away or closed by the user. – Mac, Windows, Linux, Chrome OS, Android

Default



Your changes will take effect the next time you relaunch Google Chrome. Relaunch

테스트 해 보시고 지속적으로 오류 발생 시
다음 장으로 이동

② 설정 초기화(Chrome)


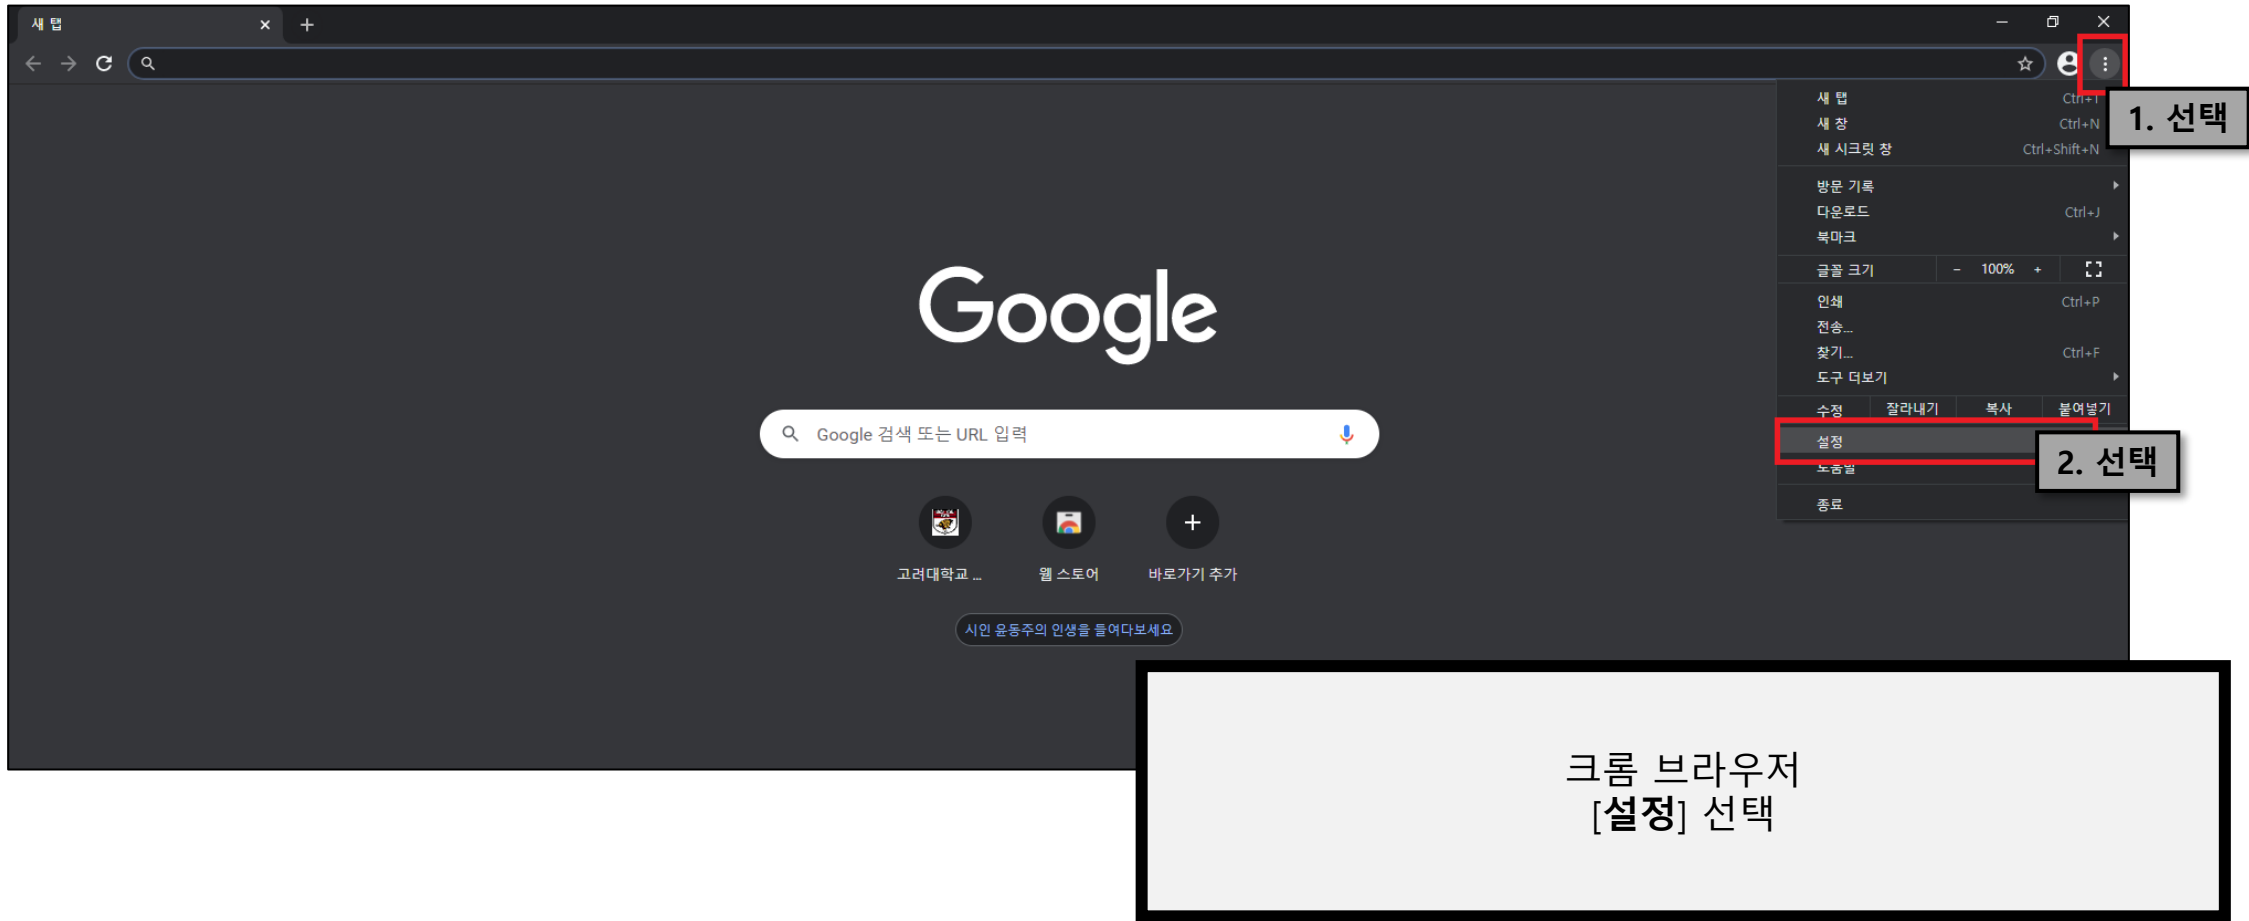


② 설정 초기화(Chrome)

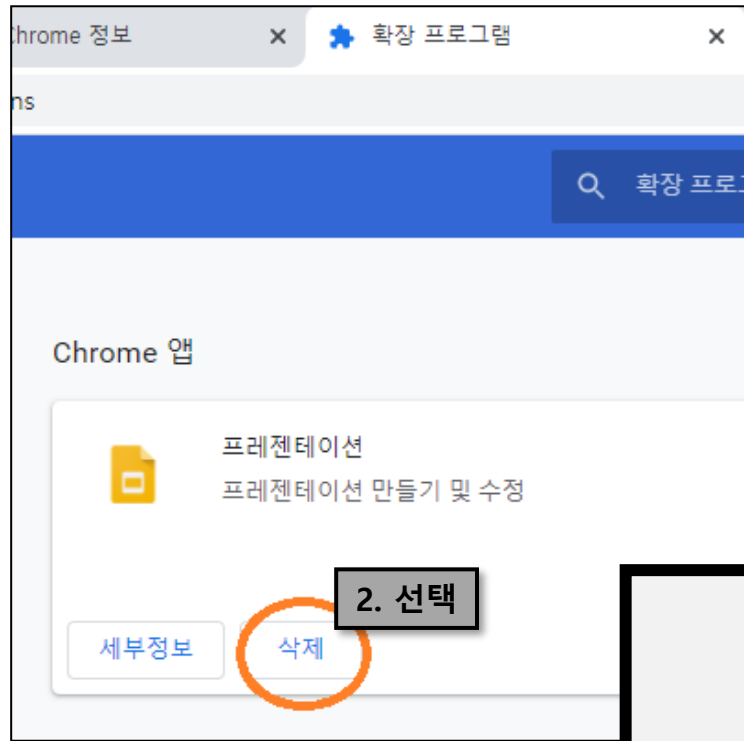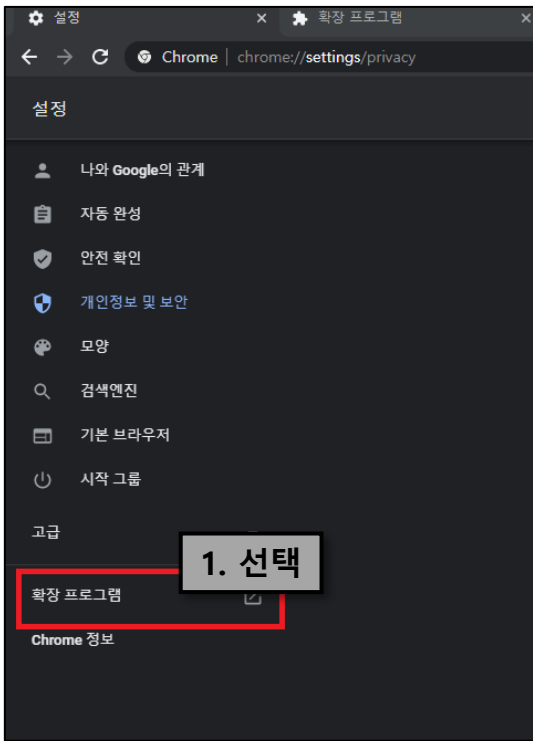

확장 프로그램에 있는 앱들을 일괄 삭제


② 설정 초기화(Chrome)

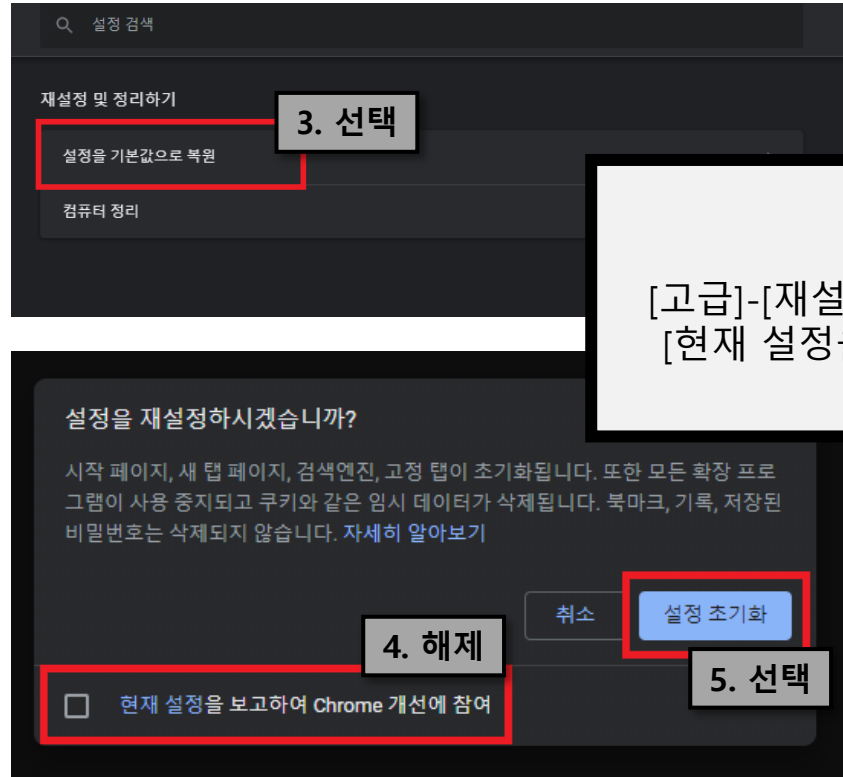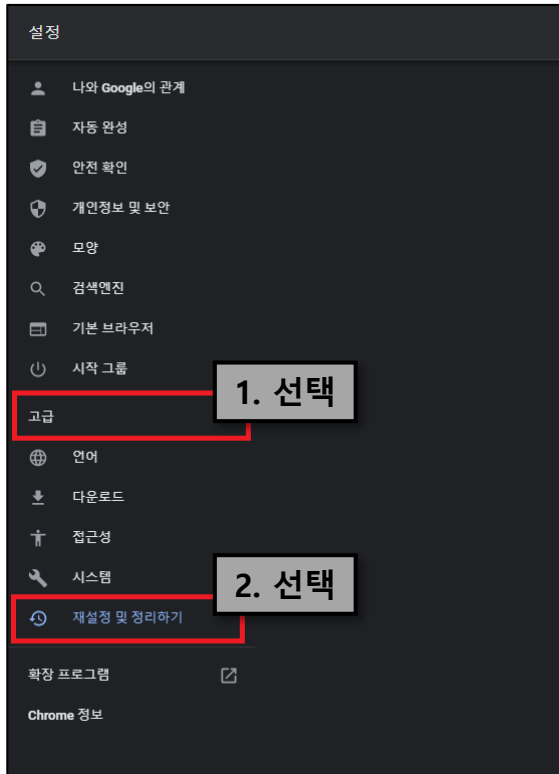

설정 초기화 진행


[고급]-[재설정 및 정리하기]-[설정을 기본값으로 복원]
 [현재 설정을 보고하여 Chrome 개선에 참여]해제 후
 [설정 초기화] 선택

② 설정 초기화(Chrome)

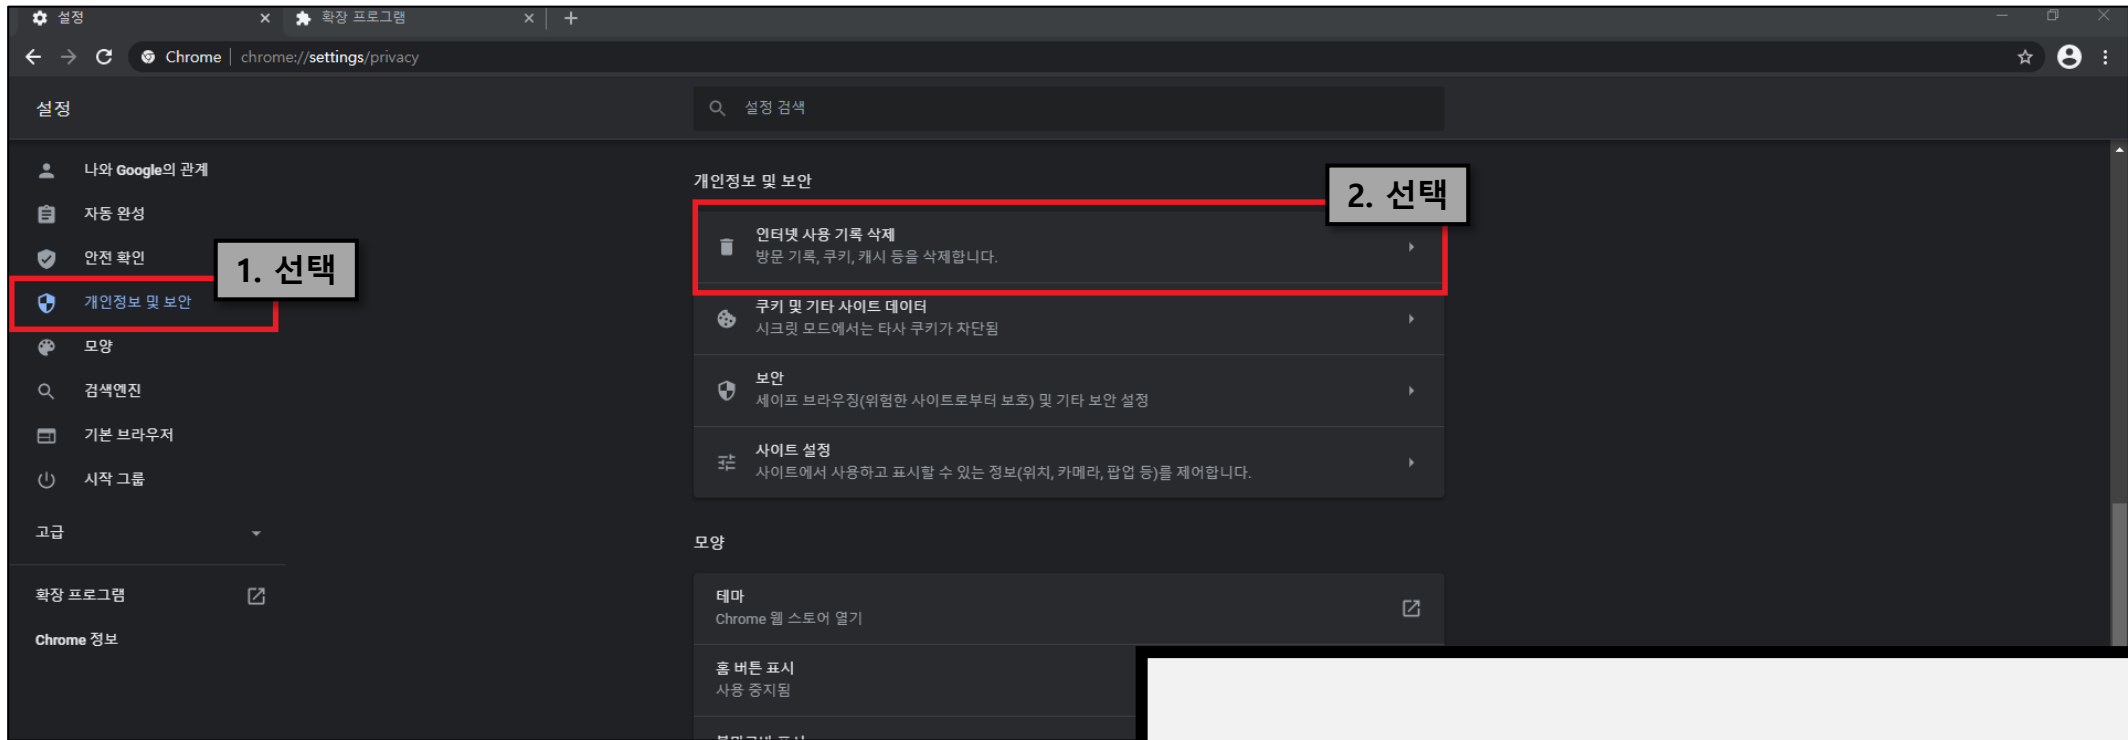

[개인정보 및 보안]-[인터넷 사용 기록 삭제]

② 설정 초기화(Chrome)

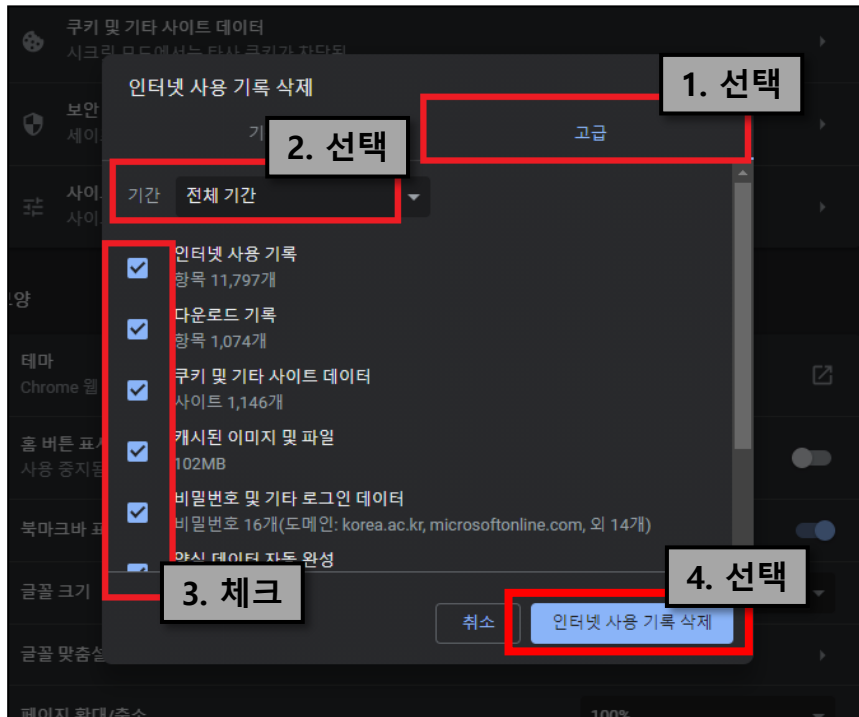

인터넷 사용 기록 삭제 창에서 [고급]-[전체 기간]
[모든 항목 선택] 후 인터넷 사용 기록 삭제 클릭

② 브라우저 재설치(Chrome)




재설치 후에도 같은 상황이 반복된다면
설정 초기화-재설치 과정을 반복해주시기 바랍니다

[제어판]-[프로그램 및 기능]에서 **Chrome 제거**

컴퓨터 다시 시작 후 Explorer, Edge 등의
다른 브라우저를 이용하여 **Chrome 재설치**
이후 고려대학교 포털 사이트 정상적으로 사용 가능


Internet Explorer

① 설정 초기화(Internet Explorer)

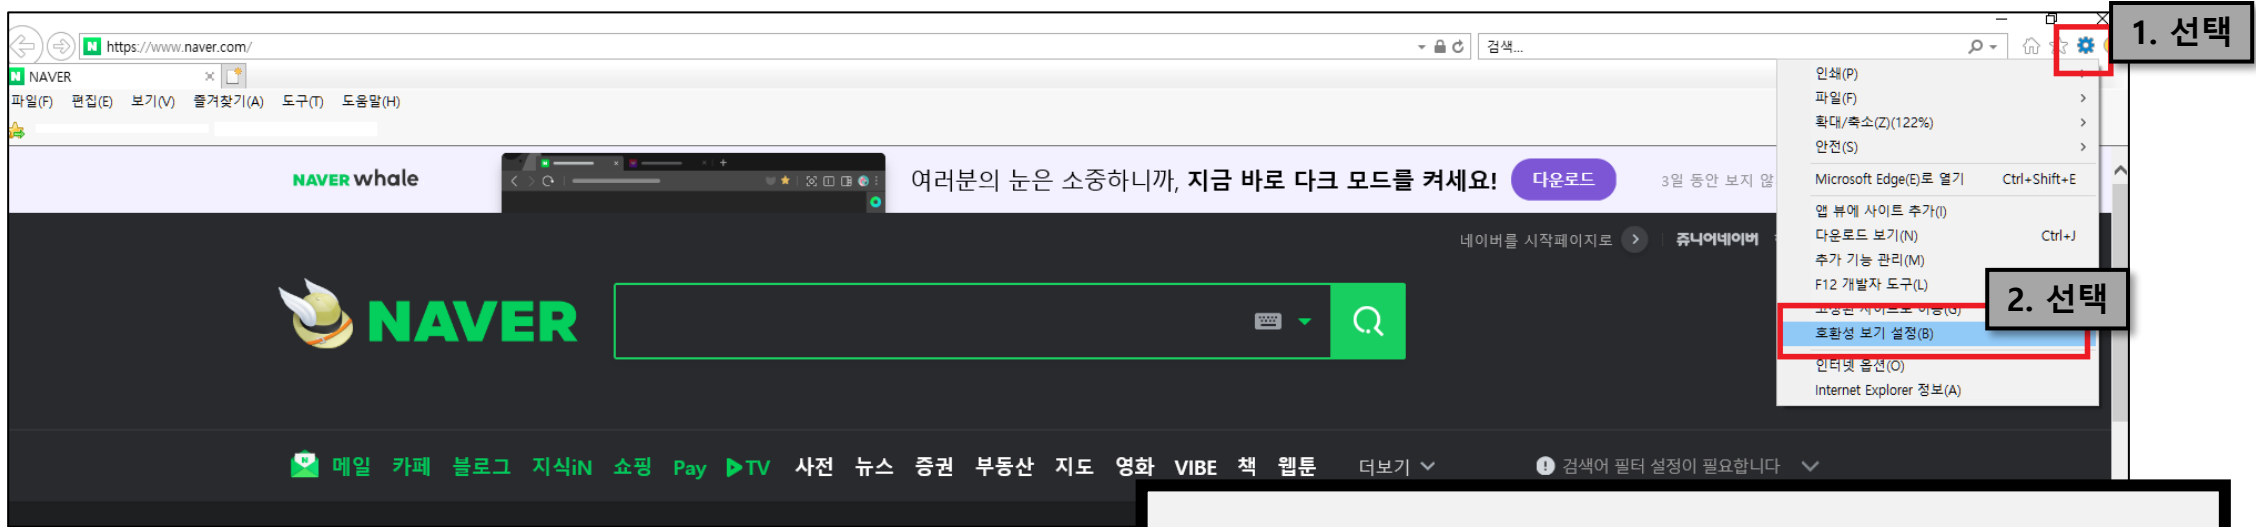


인터넷 익스플로러 설정 초기화
톱니 바퀴 [설정] 버튼 - [호환성 보기 설정]

① 설정 초기화(Internet Explorer)

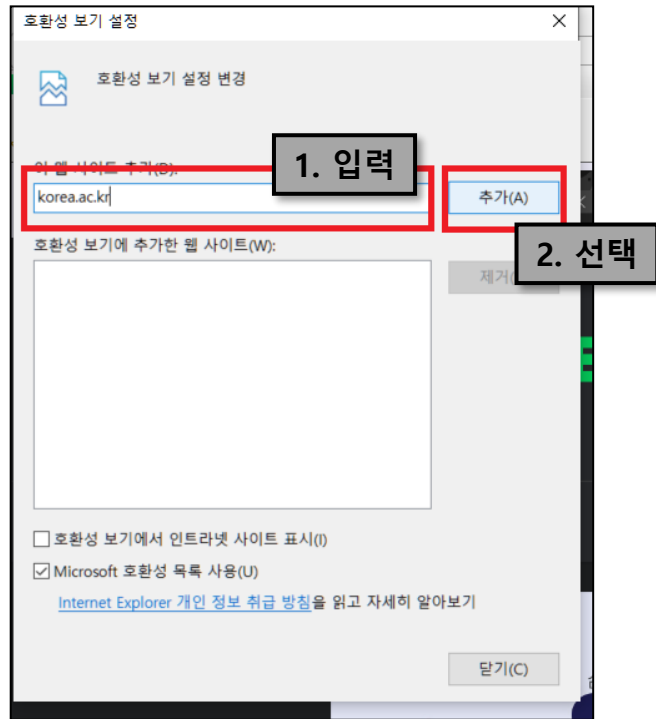


[호환성 보기 설정]에서 **korea.ac.kr** 입력 후
[추가] 선택

① 설정 초기화(Internet Explorer)

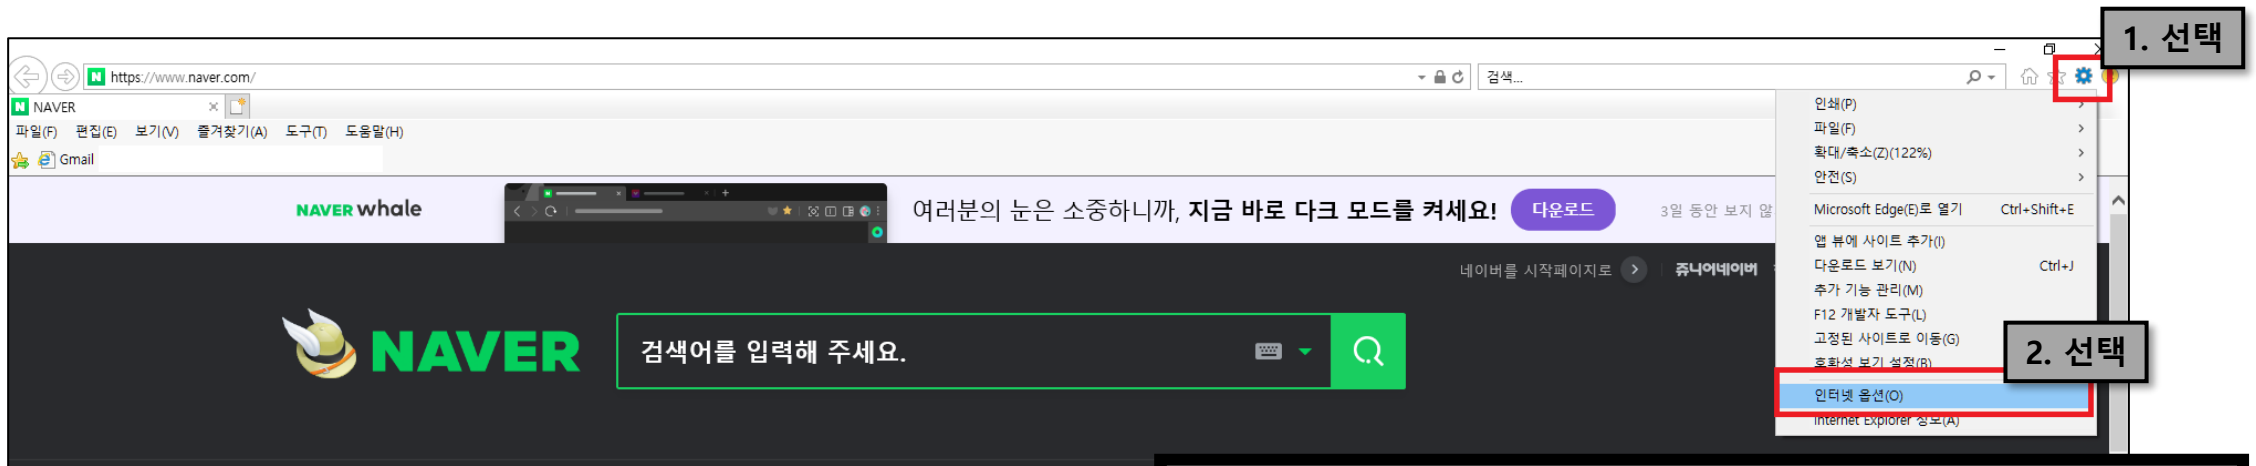

인터넷 익스플로러 설정 초기화 2
톱니 바퀴 [설정] 버튼 - [인터넷 옵션]

① 설정 초기화(Internet Explorer)

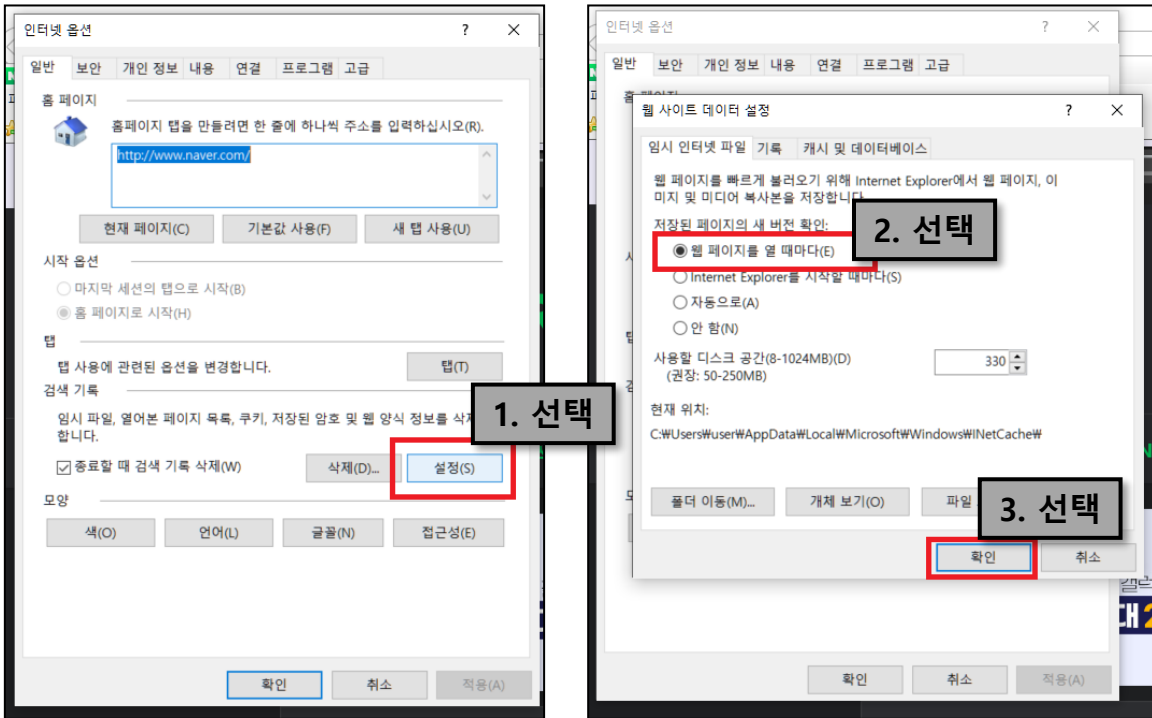

인터넷 옵션 창에서
[설정]-[웹 페이지를 열 때마다]-[확인]
 컴퓨터 다시 시작 후 브라우저 이용 가능

데이터Hub팀

문의 datahub@korea.ac.kr / 4777, 4187 (내선번호)